
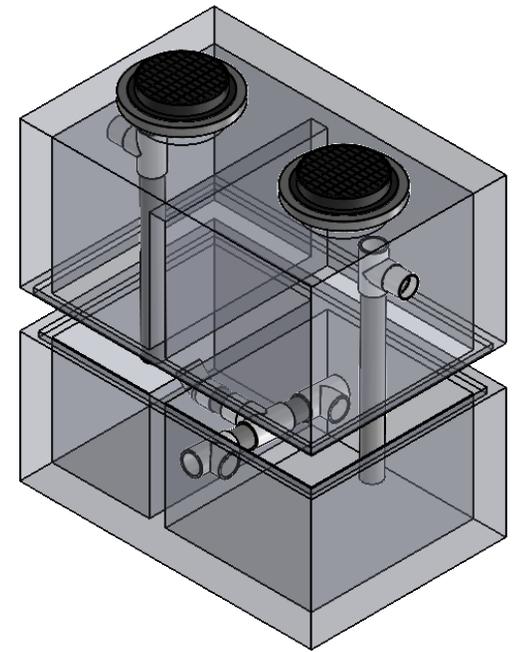


24" R&C 4" Adjustment Rings As Needed

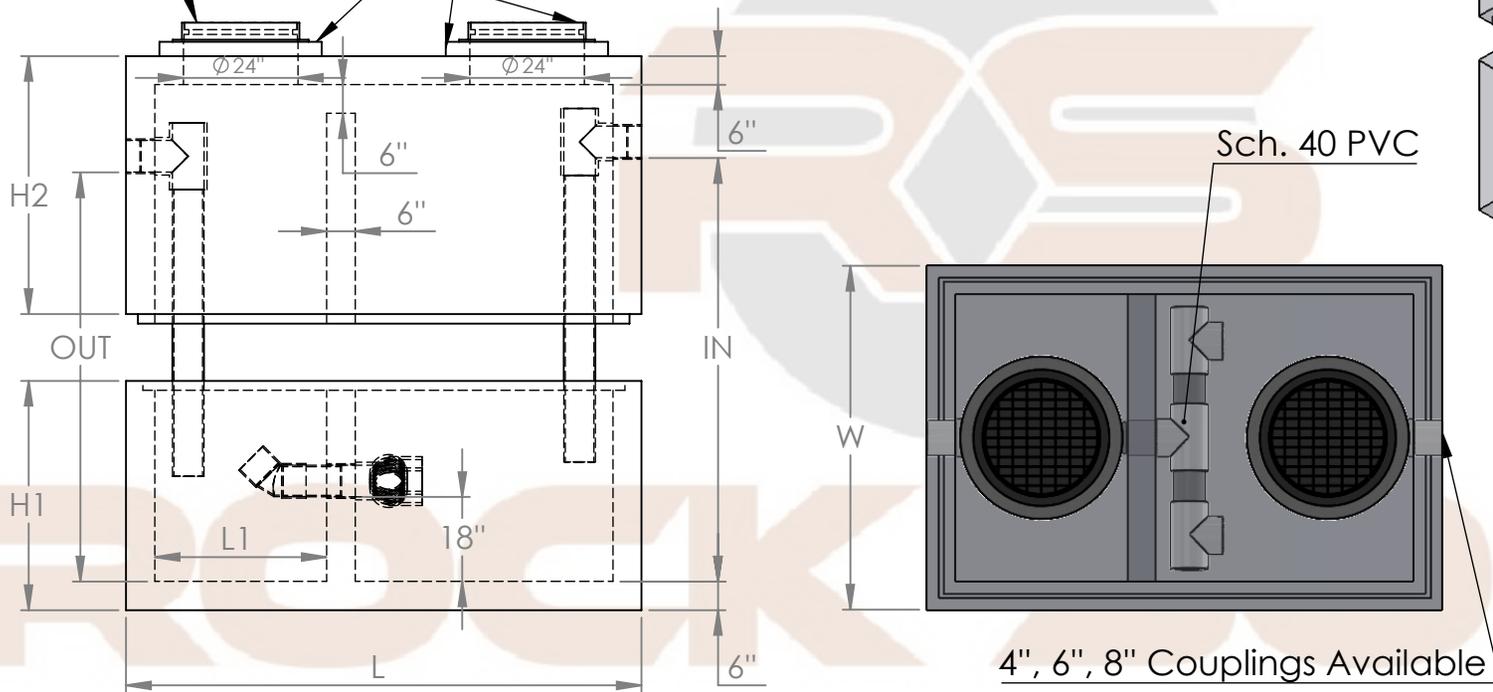

ROCK SOLID PRECAST

Concrete
28 day compressive strength of 4,500 PSI
Cement
Per ASTM C150: Type I
Reinforcement
Rebar per ASTM A615 Grade 60
Cast Iron
Meets ASTM A48 and CL35B Standards

Rock Solid Precast, L.P.

11393 Sleepy Hollow Road PO Box 8066
Conroe, TX 77385 The Woodlands, TX 77387

(281) 364-7474

TITLE

2,000 - 4,000 Gallon Grease Trap
Submittal

DWG. NO. Grease Trap Submittal

DRAWN/CHECKED WEIGHT

Capacity (Gal.)	L	W	L1	H1	H2	IN	OUT	Total Weight (Lbs.)	Base Weight (Lbs.)	Top Weight (Lbs.)
2000	108"	72"	36"	48"	54"	81"	78"	27,069	12,863	14,206
2500	156"	84"	48"	42"	42"	69"	66"	33,637	17,025	16,613
3000	156"	84"	48"	48"	54"	81"	78"	38,525	18,488	20,038
4000	192"	102"	60"	42"	42"	69"	66"	45,056	22,847	22,874

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ROCK SOLID PRECAST, LP. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ROCK SOLID PRECAST, LP IS PROHIBITED.