

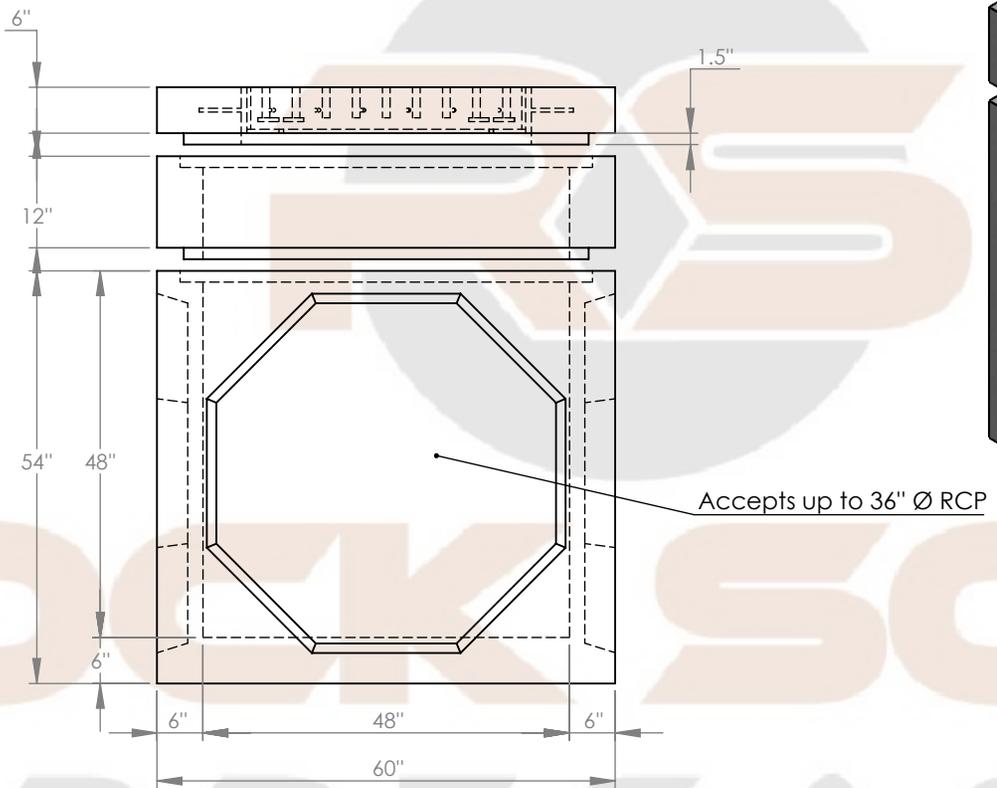


ITEM NO.	PART NUMBER	DESCRIPTION	WEIGHT (Lbs)	QTY.
1	484848BKO	48" x 48" x 48" ID Base (Knockouts)	4786.91	1
2	484812R	48" x 48" x 12" ID Riser	1336.20	As Needed
3	48486AZ	48" x 48" x 6" ID Slabtop (30" x 30" Opening)	1350.13	1
4	AZ F&G	TX DOT AZ Frame &Grate	685.5	1

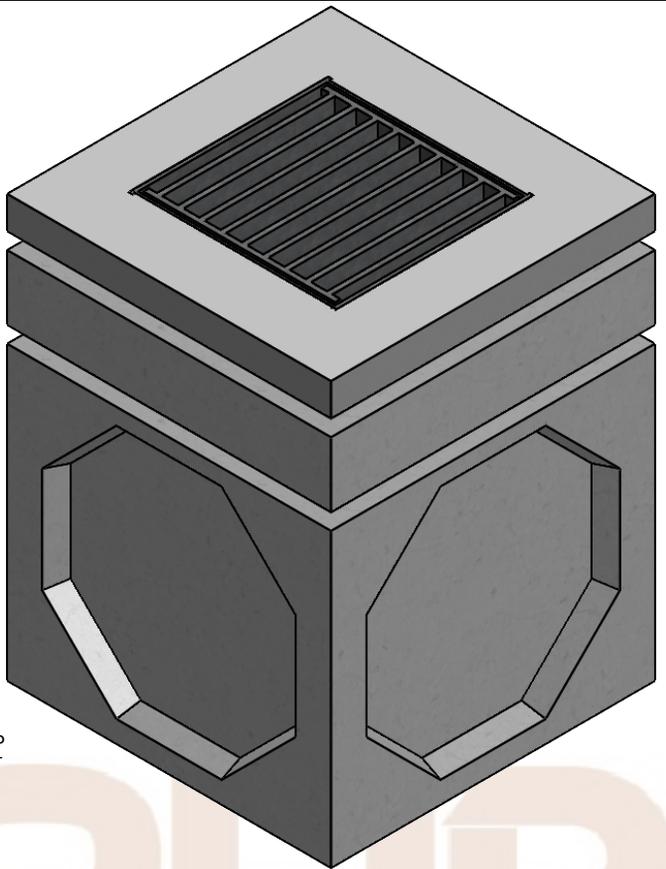

TX DOT Type AZ F&G Cast-In

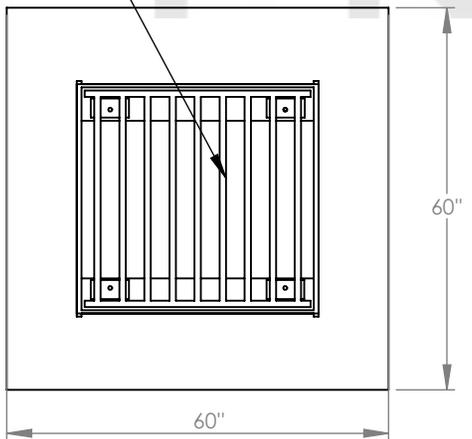

Concrete
 28 day compressive strength of 4,500 PSI
 Bottoms to be monolithic at floor and at first stage of wall

Cement
 Per ASTM C150: Type I

Reinforcement
 Rebar per ASTM A615 Grade 60
 Wire Mesh per ASTM A1064

Loading
 Live Load: H20

Cast Iron
 Meets ASTM A48 and CL35B Standards

Rock Solid Precast, L.P.

11393 Sleepy Hollow Road
 Conroe, TX 77385

PO Box 8066
 The Woodlands, TX 77387

(281) 364-7474

TITLE	48"x48" AZ Inlet Submittal	
DWG. NO.	4848AZ Submittal Drawing	
DRAWN/CHECKED	WEIGHT : VARIES	

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ROCK SOLID PRECAST, LP. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ROCK SOLID PRECAST, LP IS PROHIBITED.