
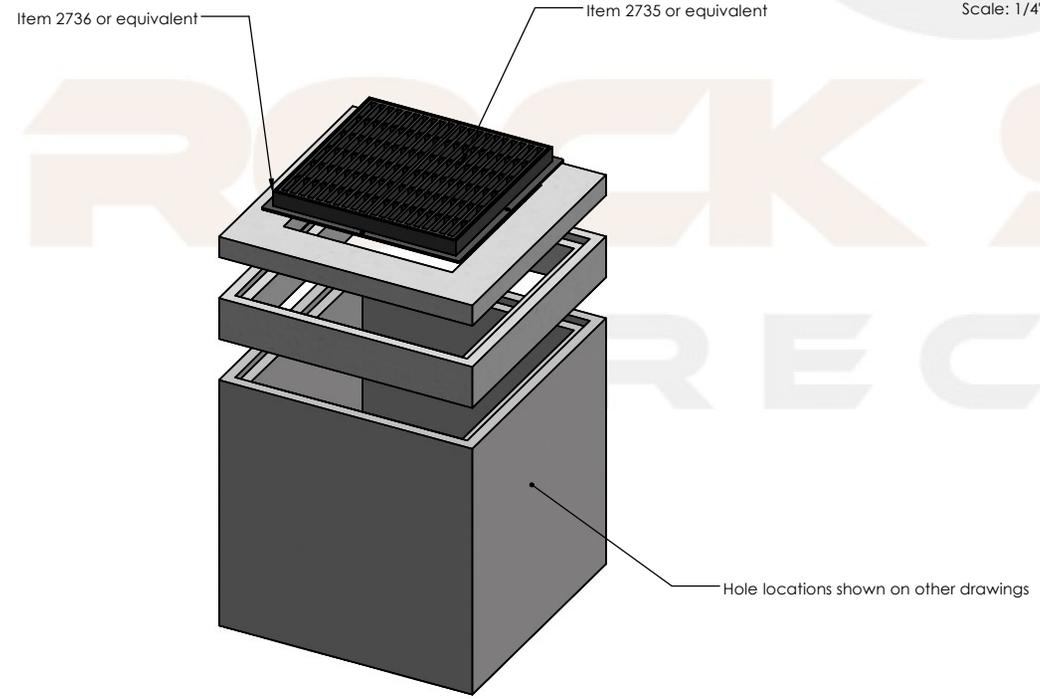
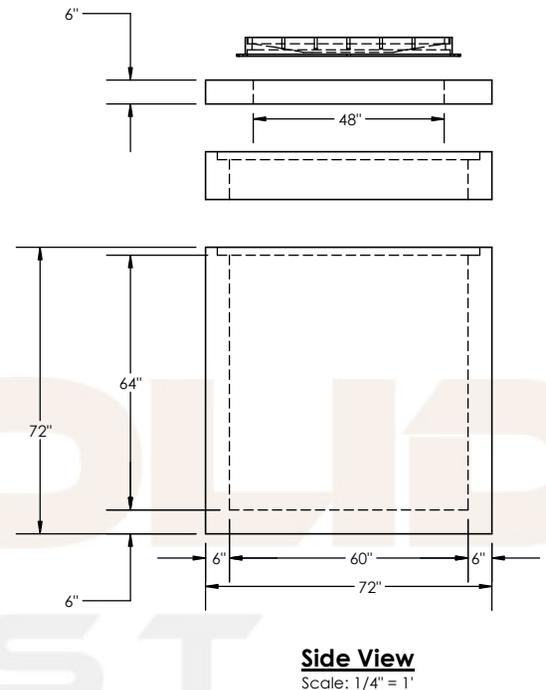


Description	Product Code	Weight (Lbs.)
Bases		
60" x 60" x 66" ID Custom Base	606066B	11,660
Risers		
60" x 60" x 6" ID Riser	60606R	750
60" x 60" x 12" ID Riser	606012R	1,500
60" x 60" x 24" ID Riser	606024R	3,000
60" x 60" x 36" ID Riser	606036R	4,500
Slab Top		
60" x 60" ID Slab Top x 6" Tall with 48" x 48" Opening	60606ST4848	1,500
Cast Iron		
48" x 48" Reversible Frame	4848FR	280
50.25" x 50.25" Grate	4848GR	440

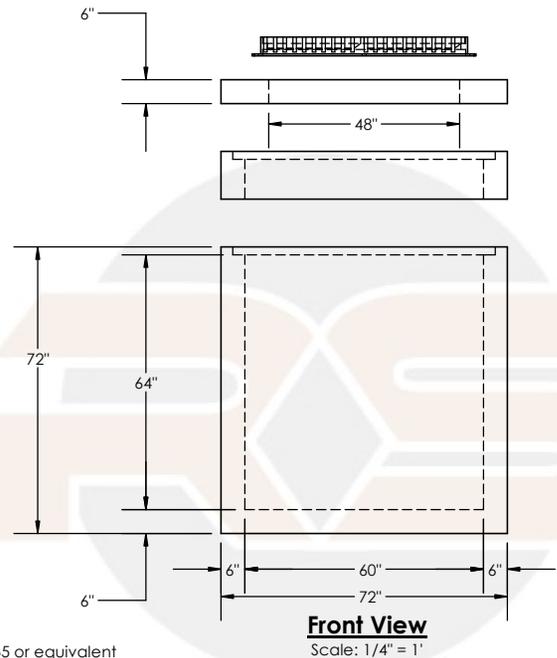

Concrete
 28 day compressive strength of 4,500 PSI
 Bottoms to be monolithic at floor and at first stage of wall

Cement
 Per ASTM C150: Type I

Cast Iron
 Meets ASTM A48 and CL35B Standards

Reinforcement
 Rebar per ASTM A615 Grade 60

Rock Solid Precast, L.P.

11393 Sleepy Hollow Road
 Conroe, TX 77385

PO Box 8066
 The Woodlands, TX 77387

(281) 364-7474

TITLE

60" x 60" Type A Submittal Drawing
 with 48" x 48" Reversible Cast Iron

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE
 SOLE PROPERTY OF ROCK SOLID PRECAST, LP. ANY
 REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE
 WRITTEN PERMISSION OF ROCK SOLID PRECAST, LP IS
 PROHIBITED.

DWG. NO.
 60A48RFG Submittal Drawing

DRAWN CHECKED WEIGHT
 MKK