
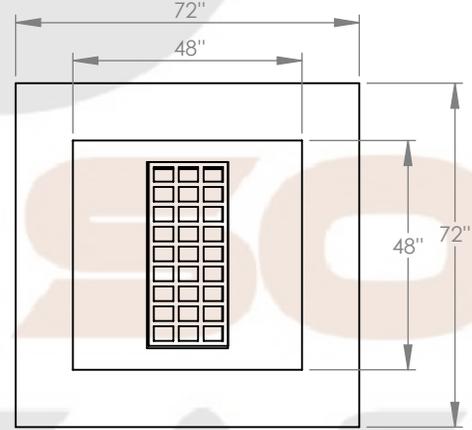
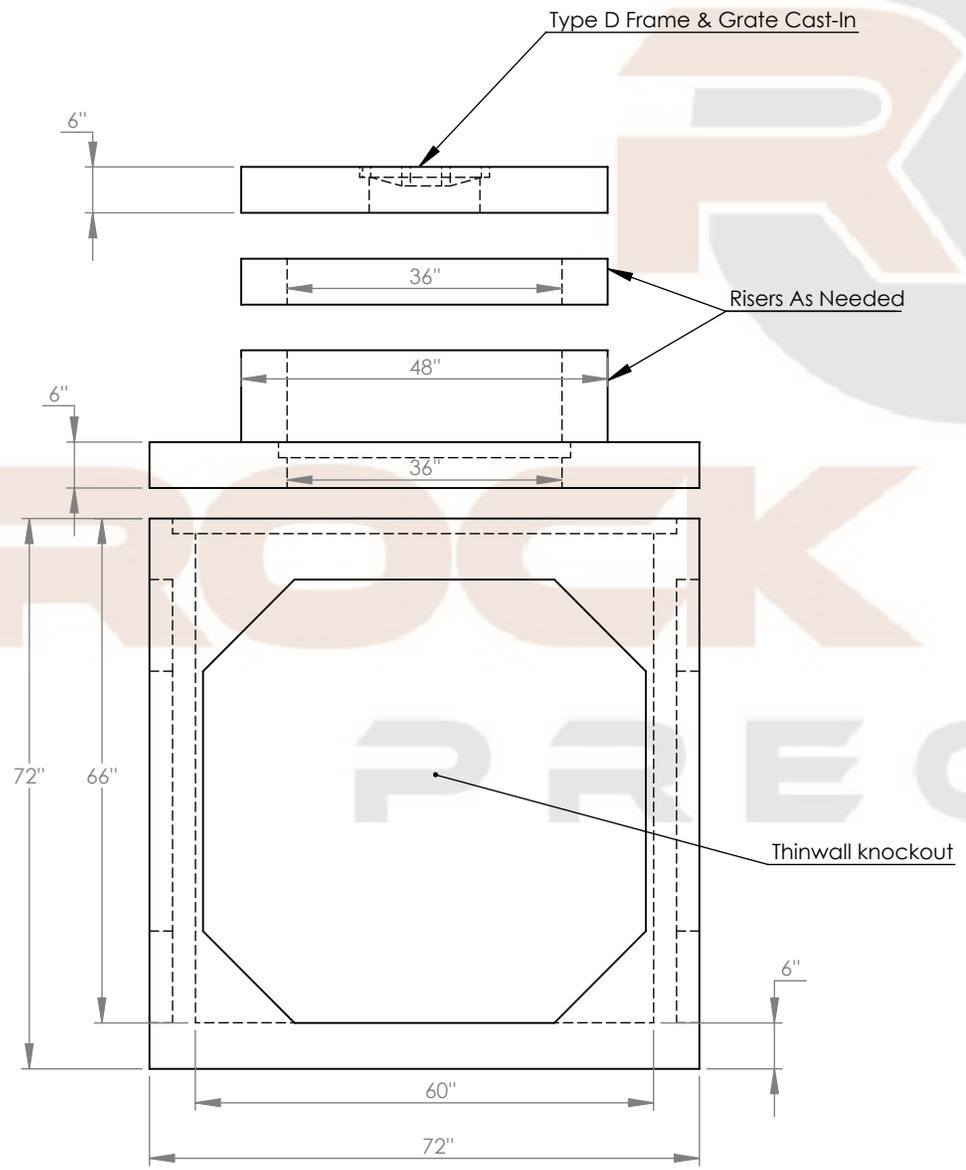


Product Code	Description	Weight (Lbs.)	Qty.
606066BKO	60" x 60" x 66" ID Base (Knockouts)	8452.79	1
606066ST3838	60" x 60" ID x 6" Slabtop (36" x 36" Opening)	1998.21	1
36366R	36" x 36" x 6" ID Riser	525.05	As Needed
363612R	36" x 36" x 12" ID Riser	1050.10	As Needed
363666ST3917	36" x 36" ID x 6" Slabtop (39" x 17" Opening)	909.20	1
3917G	39" x 17" Grate	154.84	1

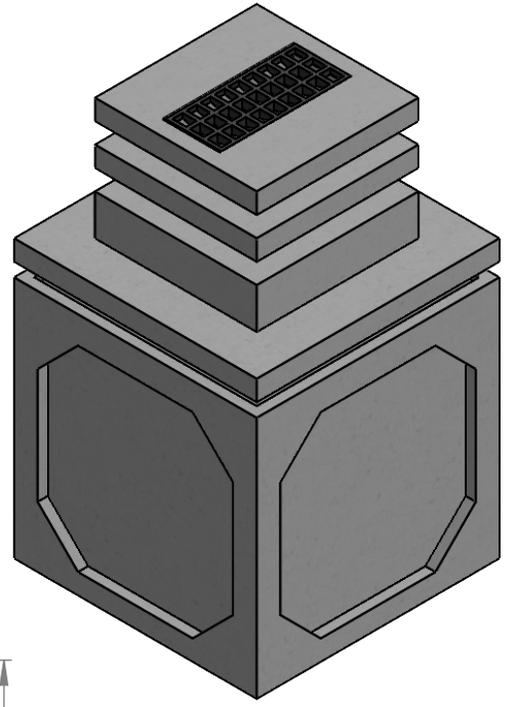

Concrete

Per ASTM C150: Type I/II with 28 day compressive strength of 4,500 PSI. Bottoms to be monolithic at floor and at first stage of wall with sectional riser required to depth.

Loading

Designed to H-20 loading

Design

Per ASTM C913

Cast Iron

Manufactured of grey cast iron conforming to ASTM A48 CL35B Standards

Reinforcement

Rebar per ASTM A615 Grade 60
Wire Mesh per ASTM A1064.

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ROCK SOLID PRECAST, LP. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ROCK SOLID PRECAST, LP IS PROHIBITED.

Rock Solid Precast, L.P.

11393 Sleepy Hollow Road
Conroe, TX 77385

PO Box 8066
The Woodlands, TX 77387

(281) 364-7474

TITLE

60"x60" Type D Submittal

DWG. NO. 60D TRANSITION Drawing

DRAWN/CHECKED WEIGHT: Varies