
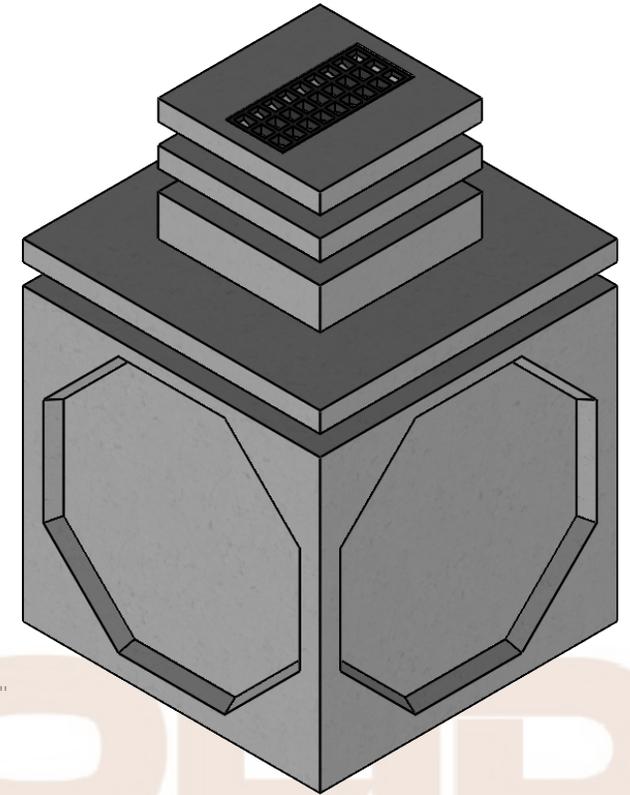
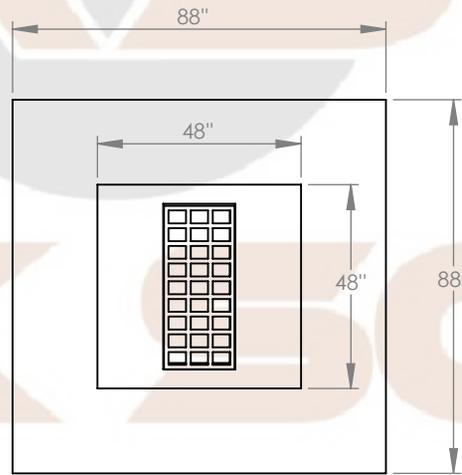


Product Code	Description	Weight (Lbs.)	Qty.
727278BKO	72" x 72" x 78" ID Base (Knockouts)	16434.60	1
72726ST36368 wall	72" x 72" ID x 6" Slabtop (36" x 36" Opening)	3363.59	1
363612R	36" x 36" x 12" ID Riser	1050.10	As Needed
36366R	36" x 36" x 6" ID Riser	525.05	As Needed
36366ST3917	36" x 36" ID x 6" Slabtop (39" x 17" Opening)	909.20	1
3917G	39" x 17" Grate	154.84	1

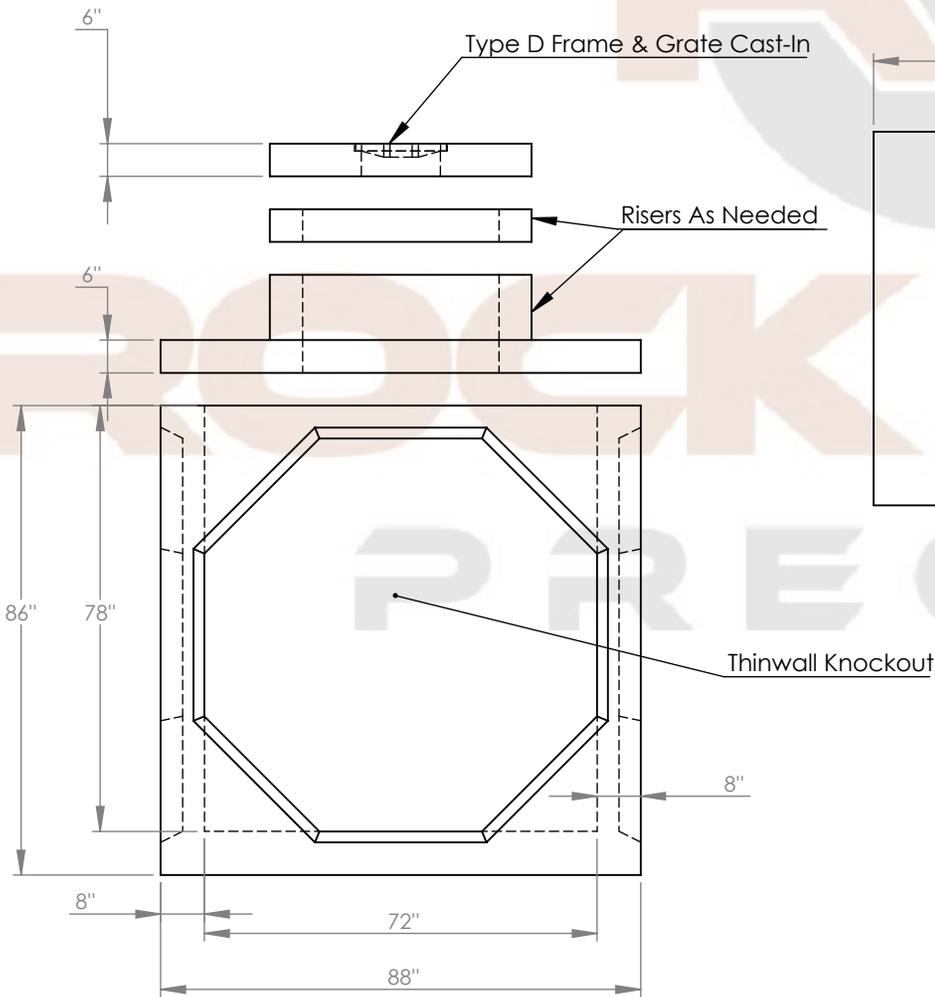

**Concrete**

Per ASTM C150: Type I/II with 28 day compressive strength of 4,500 PSI. Bottoms to be monolithic at floor and at first stage of wall with sectional riser required to depth.

**Loading**

Designed to H-20 loading

**Design**

Per ASTM C913

**Cast Iron**

Manufactured of grey cast iron conforming to ASTM A48 CL35B Standards

**Reinforcement**

Rebar per ASTM A615 Grade 60  
Wire Mesh per ASTM A1064.

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ROCK SOLID PRECAST, LP. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ROCK SOLID PRECAST, LP IS PROHIBITED.

**Rock Solid Precast, L.P.**

11393 Sleepy Hollow Road  
Conroe, TX 77385

PO Box 8066  
The Woodlands, TX 77387

(281) 364-7474

**TITLE**

72"x72" Type D Submittal

**DWG. NO.**

72D Submittal Drawing

**DRAWN/CHECKED**

WEIGHT: Varies