
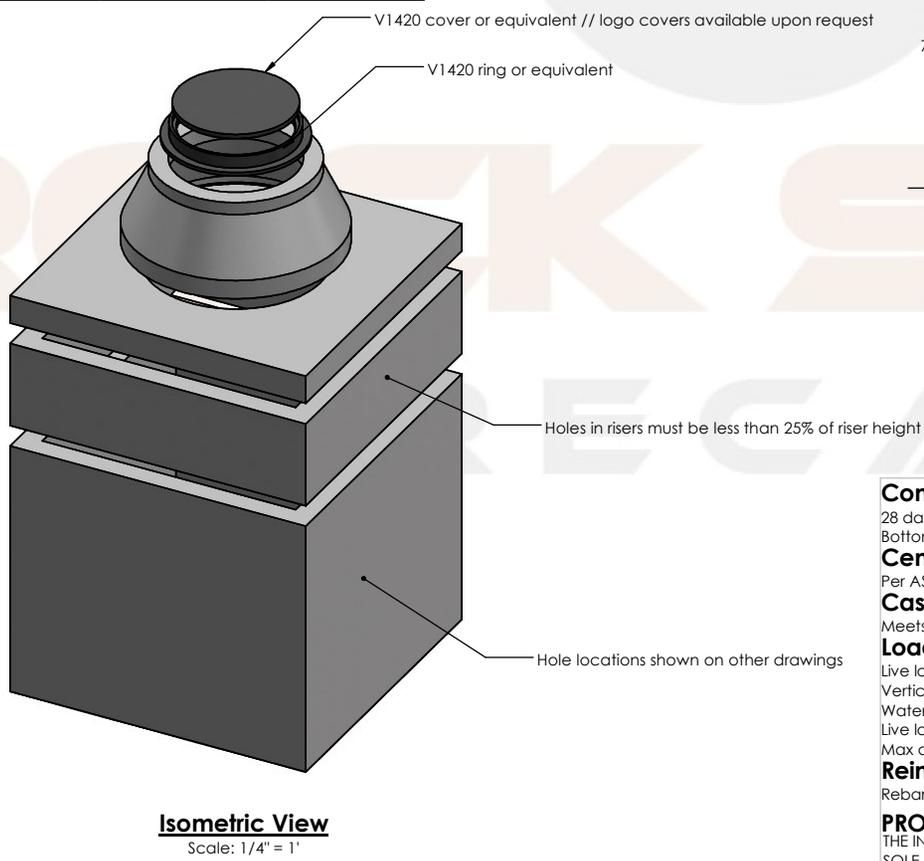


Description	Product Code	Weight (Lbs.)
<b>Bases</b>		
72" x 72" x 66" ID Custom Base	727266B	14,400
<b>Risers</b>		
72" x 72" x 6" ID Riser	72726R	975
72" x 72" x 12" ID Riser	727212R	1,950
72" x 72" x 24" ID Riser	727224R	3,900
72" x 72" x 36" ID Riser	727236R	5,850
<b>Slab Top</b>		
72" x 72" ID Slab Top x 8" Tall with 32" Ø Opening	72728ST32	4,340
72" x 72" ID Slab Top x 8" Tall with 48" Ø Opening	72728ST48	3,645
<b>Cones</b>		
48" Ø x 34" Ø x 24" Tall Cone	4824C	1,700
48" Ø x 34" Ø x 36" Tall Cone	4836C	2,500
<b>Cast Iron</b>		
32" Ring	32R	75
32" Cover	32C	175

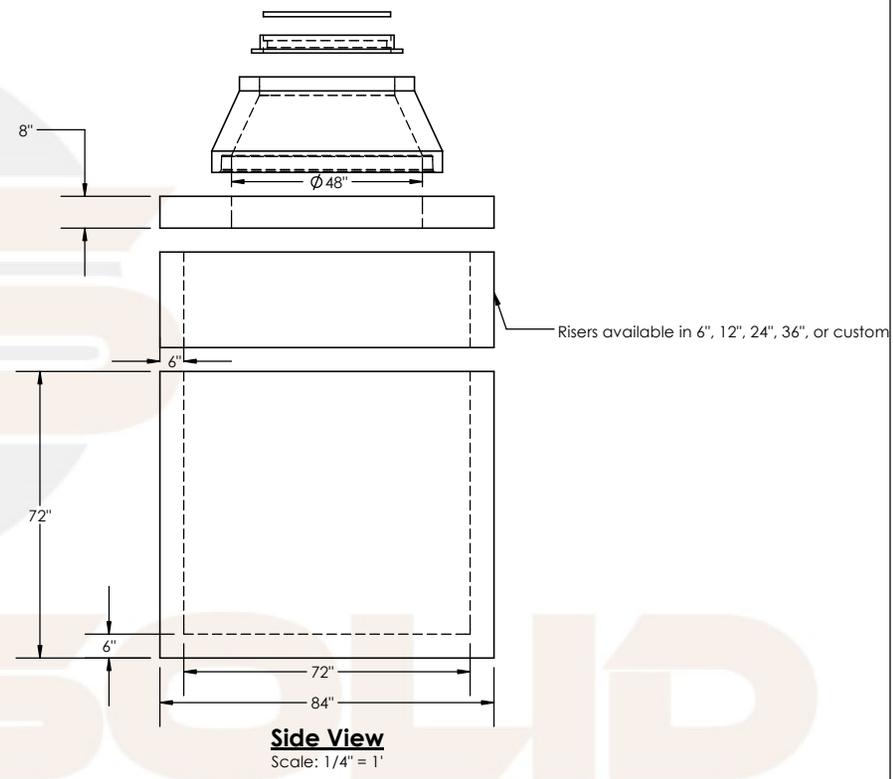

**Concrete**  
28 day compressive strength of 4,500 PSI  
Bottoms to be monolithic at floor and at first stage of wall

**Cement**  
Per ASTM C150: Type I

**Cast Iron**  
Meets ASTM A48 and CL35B Standards

**Loading**  
Live load: HS-20  
Vertical soil: 120 PCF, Lateral Soil: 45 PCF  
Water table: assumed 5' below grade  
Live load surcharge: 80 PSF to 8' depth  
Max depth: 12' from rim to box bottom

**Reinforcement**  
Rebar per ASTM A615 Grade 60

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ROCK SOLID PRECAST, LP. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ROCK SOLID PRECAST, LP IS PROHIBITED.

**Rock Solid Precast, L.P.**

11393 Sleepy Hollow Road  
Conroe, TX 77385

PO Box 8066  
The Woodlands, TX 77387

(281) 364-7474

TITLE

72" x 72" Storm Manhole Hole Specific  
Submittal Drawing

DWG. NO.  
72MHHS Submittal Drawing

DRAWN	CHECKED	WEIGHT
MKK		