
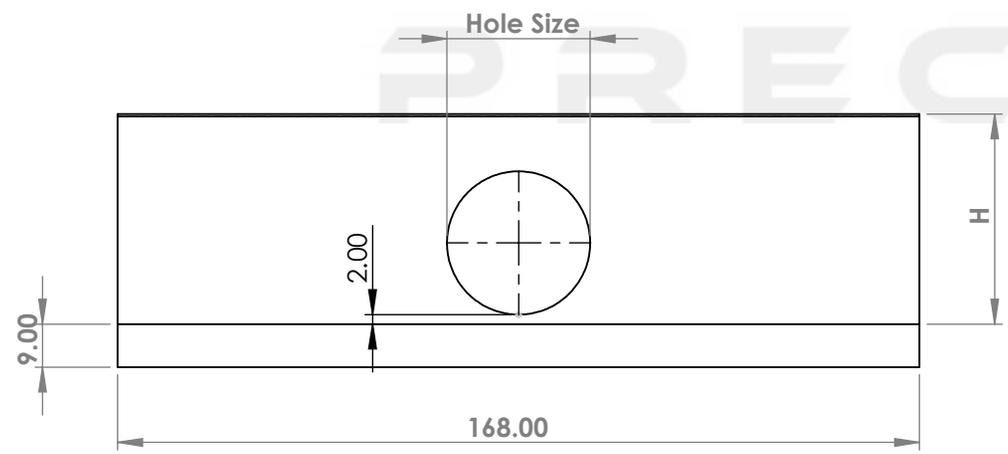
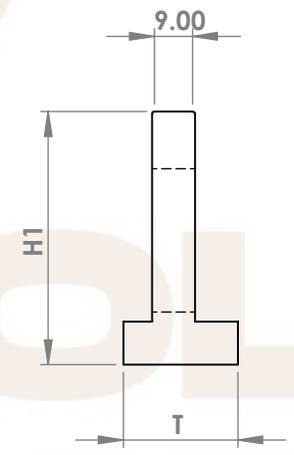
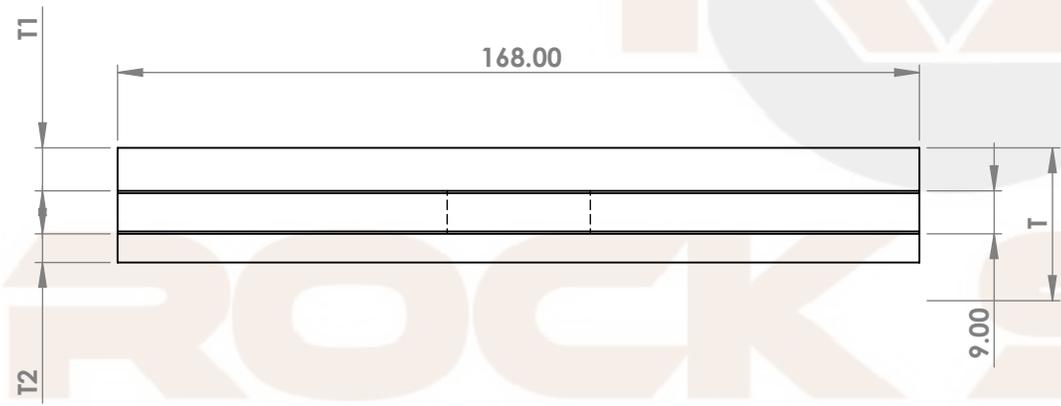


Pipe Size	Hole Size	H	H1	T	T1	T2	Weight (Lbs)
12"	21"	40"	49"	24"	9"	6"	8,050
15"	24"	40"	49"	24"	9"	6"	8,005
18"	27"	40"	49"	24"	9"	6"	7,958
24"	32"	44"	53"	24"	9"	6"	8,362
30"	42"	57"	66"	24"	9"	6"	8,654
36"	48"	57"	66"	24"	9"	6"	9,216
42"	54"	63"	72"	32"	13"	10"	10,679
48"	62"	75"	84"	32"	13"	10"	11,684

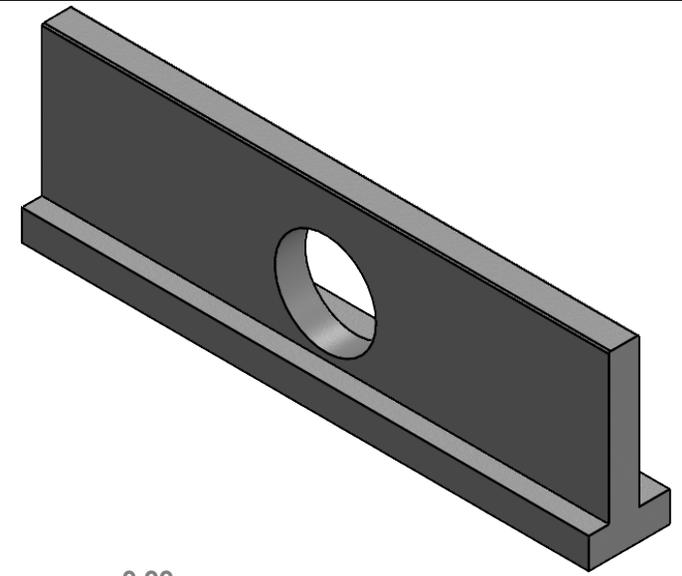

Concrete
28 day compressive strength of 4,500 PSI

Cement
Per ASTM C150: Type I

Reinforcement
Rebar per ASTM A615 Grade 60

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ROCK SOLID PRECAST, LP. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ROCK SOLID PRECAST, LP IS PROHIBITED.

Rock Solid Precast, L.P.

11393 Sleepy Hollow Road
Conroe, TX 77385

PO Box 8066
The Woodlands, TX 77387

(281) 364-7474

TITLE
Straight Headwall Submittal

DWG. NO. Straight Headwall Submittal
DRAWN/CHECKED Drawing
WEIGHT: VARIES